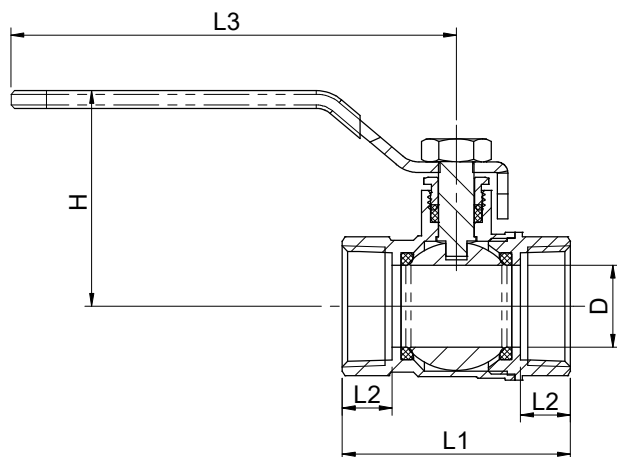


PN40 / CLASS 600 FULL BORE BALL VALVE

Model: AF600

**SPECIFICATIONS**

- Forged brass
- Screwed end : BSPT or NPT
- Full bore design
- 2 piece design
- Blow out proof stem
- Lever handle operation
- Applicable temperature : -20 ~ 120 ° C
- Applicable media : W.O.G. and steam

TEST PRESSURE


Nominal Pressure	:	600 Psi (42 Kg/cm ²)
Hydrostatic Shell Test Pressure	:	900 Psi (62 Kg/cm ²)
Hydrostatic Seat Test Pressure	:	660 Psi (46 Kg/cm ²)
Pneumatic Seat Test Pressure	:	90 Psi (6 Kg/cm ²)

STANDARD COMPONENT MATERIAL

NO	DESCRIPTION	QTY.	MATERIAL
1	Bonnet	1	Brass
2	Ball Seat	2	PTFE
3	Ball	1	Chrome Plated Brass
4	Body	1	Brass
5	Packing Gland	1	PTFE
6	Packing Nut	1	Brass
7	Handle	1	Chrome Plated Steel
8	Spring Washer	1	Steel
9	Nut	1	Chrome Plated Steel
10	Stem	1	Brass

DIMENSION TABLE (MM)

Size		D	L1	L2	L3	H	Weight (Kg)
DN	Inch						
8	1/4	10	42	10.5	89	39	0.127
10	3/8	10	43	11	89	39	0.130
15	1/2	15	54	13.5	98.5	48	0.200
20	3/4	20	63	15.5	98.5	52	0.320
25	1	24.5	72	17.5	125	60.7	0.489
32	1-1/4	30	82	19	140	74.5	0.640
40	1-1/2	40	94	19	140	82.5	0.955
50	2	50	114	23.5	165	92.5	1.640

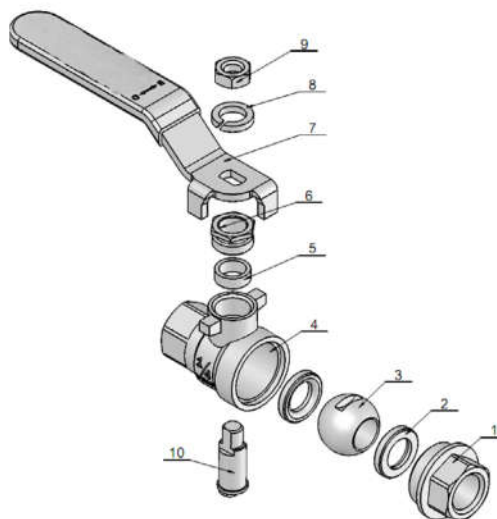A MEMBER OF UNIMECH GROUP
MALAYSIA**ARITA VALVE MFG. (M) SDN. BHD.**

The contents of this literature are for interaction purposes only. Arita is not responsible for suitability or compatibility of these Products in relation to system requirement. For specific requirements, consult Arita or its distributors. Arita reserves the right to change or modify product design without prior notice.